

Industrial P.O.E Lite-Managed Ethernet Switch

IPS-2000 Series User's Manual



Version 1.0
May, 2008.



ORing Industrial Networking Corp.

4F., NO.3, Lane235, Baociao Rd.Sindian City,
Taipei County 23145 Taiwan, R.O.C.

Tel: + 886 2 2918 3036

Fax:+ 886 2 2918 3084

Website : www.oring-networking.com

E-mail : support@oring-networking.com

Table of Content

Getting to Know Your Switch	3
1.1 About the IPS-2000 Series Smart Industrial Switch.....	3
1.2 Software Features	3
1.3 Hardware Features	3
Hardware Installation	4
2.1 Installation Switch on DIN-Rail	4
2.1.1 Mount IPS-2000 Series on DIN-Rail	4
2.2 Wall Mounting Installation	5
2.2.1 Mount IPS-2000 Series on wall.....	5
Hardware Overview.....	7
3.1 Front Panel.....	7
3.2 Front Panel LEDs	10
3.3 Bottom Panel	11
3.4 Rear Panel	11
Cables	12
4.1 Ethernet Cables	12
4.1.1 100BASE-TX/10BASE-T Pin Assignments	12
4.2 Fibers	13
WEB Management.....	14
5.1 Configuration by Web Browser.....	14
5.1.1 About Web-based Management	14
5.1.2 Basic Setting.....	15
5.1.2.1 Switch setting	15
5.1.2.2 Admin Password.....	16
5.1.2.3 IP configuration	17
5.1.2.4 SNTP Configuration	18
5.1.2.5 Backup & Restore.....	21

5.1.2.6	Upgrade Firmware	22
5.1.2.7	Factory Default	22
5.1.2.8	System Reboot	22
5.1.3	Port Configuration	23
5.1.3.1	Port Control	23
5.1.3.2	Port Status	24
5.1.4	Redundancy	24
5.1.4.1	Fast Recovery Mode	24
5.1.4.2	O-Ring	25
5.1.5	RSTP	27
5.1.5.1	RSTP setting	27
5.1.6	SNMP Configuration	30
5.1.6.1	SNMP –Agent Setting	30
5.1.6.2	SNMP –Trap Setting	31
5.1.7	VLAN	32
5.1.7.1	VLAN Configuration – Port Based	32
5.1.8	Warning	33
5.1.8.1	Fault Alarm	33
5.1.9	Front Panel	37
5.1.10	Save Configuration	37
5.1.11	LLDP	38
5.1.12	Power over Ethernet (P.O.E)	38
Technical Specifications		40

Getting to Know Your Switch

1.1 About the IPS-2000 Series Smart Industrial Switch

The IPS-2000 series switch is a cost-effect and powerful industrial switch. The switch has many features; it can work under wide temperature and dusty environment. IPS series support Power over Ethernet, a system to transmit electrical power, along with data, to remote devices over standard twisted-pair cable in an Ethernet network. Each IPS switch has 4 X 10/100TX PSE (Power Sourcing Equipment) ports. PSE is a device (switch or hub for instance) that will provide power in a PoE setup.

The IPS-2000 series switch can be managed by WEB and a useful Window Utility we called Open-Vision. Open-Vision is powerful network management software. The friendly and powerful interface helps you to configure multiple switches and monitor their status at the same time.

1.2 Software Features

- World's fastest Redundant Ethernet Ring (Recovery time < 10ms over 250 units connection)
- Supports Ring Coupling, Dual Homing and RSTP over O-Ring
- Support fast recovery mode
- Easy-to-configure: Web / Windows utility
- Windows utility (Open-Vision) for network management

1.3 Hardware Features

- Wide Operating Temperature: -40 to 70°C
- Storage Temperature: -40 to 85°C
- Operating Humidity: 5% to 95%, non-condensing
- 10/100Base-T(X) Ethernet port
- 100Base-FX Fiber port


Hardware Installation

2.1 Installation Switch on DIN-Rail


Each switch has a DIN-Rail kit on rear panel. The DIN-Rail kit helps switch to fix on the DIN-Rail. It is easy to install the switch on the DIN-Rail:

2.1.1 Mount IPS-2000 Series on DIN-Rail

Step 1: Slant the switch and mount the metal spring to DIN-Rail.

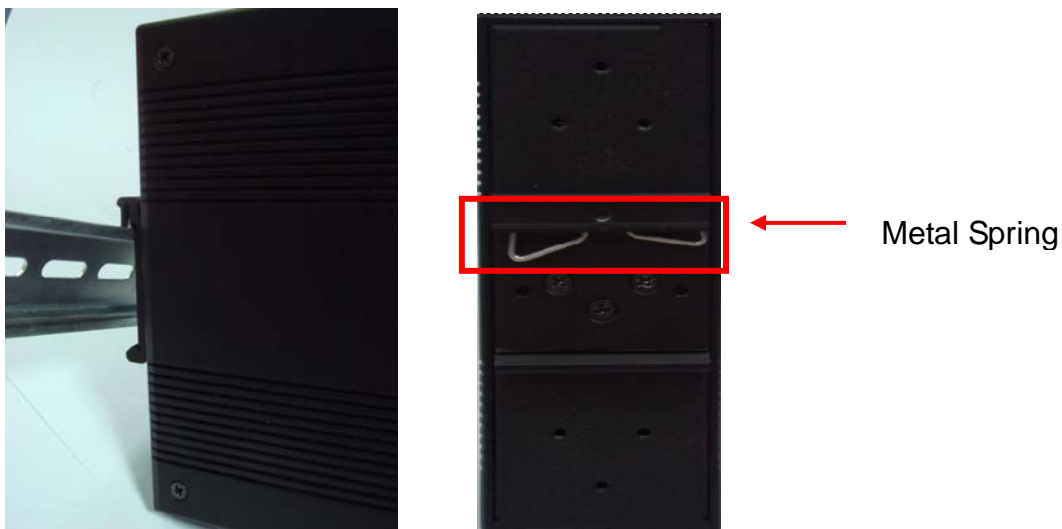

Step 2: Push the switch toward the DIN-Rail until you heard a “click” sound.

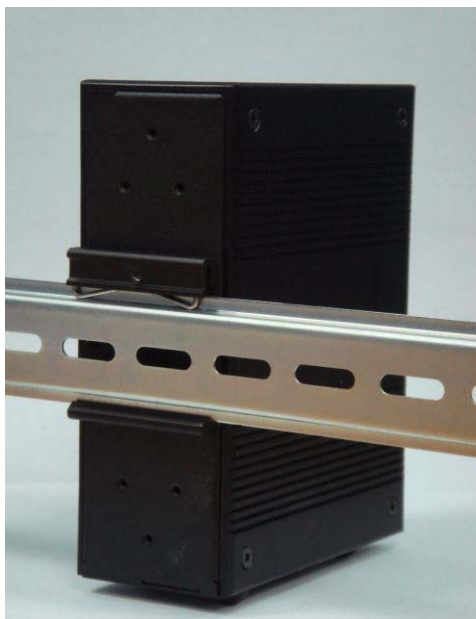


2.2 Wall Mounting Installation

Each switch has another installation method for users to fix the switch. A wall mount panel can be found in the package. The following steps show how to mount the switch on the wall:

2.2.1 Mount IPS-2000 Series on wall


Step 1: Remove DIN-Rail kit.

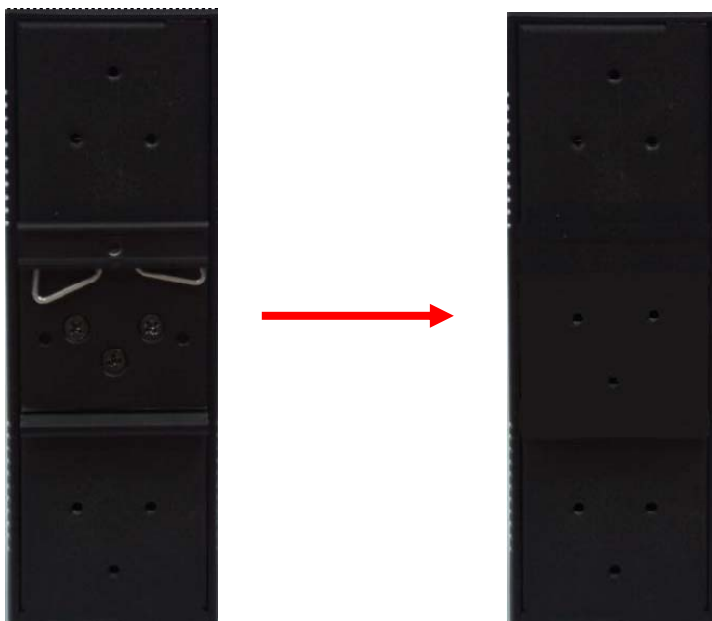

Step 2: Use 6 screws that can be found in the package to combine the wall mount panel. Just like the picture shows below:



The screws specification shows in the following two pictures. In order to prevent switches from any damage, the screws should not larger than the size that used in IPS-2000 series switches.



Step 3: Mount the combined switch on the wall.




Hardware Overview

3.1 Front Panel


The following table describes the labels that stick on the IPS-2000 series.

Port	Description
10/100 RJ-45 fast Ethernet ports	10/100Base-T(X) RJ-45 fast Ethernet ports support auto-negotiation. Default Setting : Speed: auto Duplex: auto Flow control : disable
Fiber port	100BaseFX for IPS-2042F Series
P.O.E. Port	Port 1 to port 4 contain PSE function of IEEE802.3af P.O.E. specifications.
Reset	Push reset button 2 to 3 seconds to reset the switch. Push reset button 5 second to reset the switch into Factory Default .

IPS-2042FX Seires

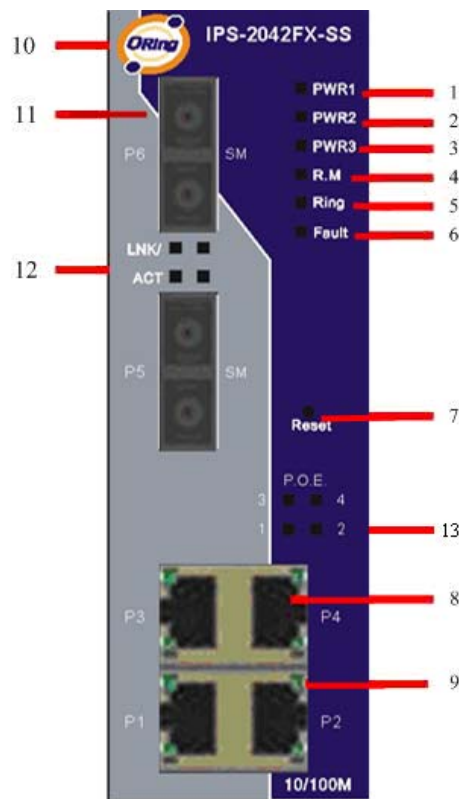

1. LED for PWR1. When the PWR1 links, the green led will be light on.
2. LED for PWR2. When the PWR2 links, the green led will be light on.
3. LED for PWR3. When the PWR3 links, the green led will be light on.
4. LED for R.M (Ring master). When the LED light on, it means that the switch is the ring master of O-Ring.
5. LED for Ring. When the led light on, it means the O-Ring is activated.
6. LED for Fault Relay. When the fault occurs, the amber LED will be light on.
7. Reset button. Push the button 3 seconds for reset; 5 seconds for factory default.
8. 10/100Base-T(X) Ethernet ports.
9. LED for Ethernet ports status.
10. Model name
11. 100BaseFX fiber port.
12. LED for fiber port.
13. LED for P.O.E

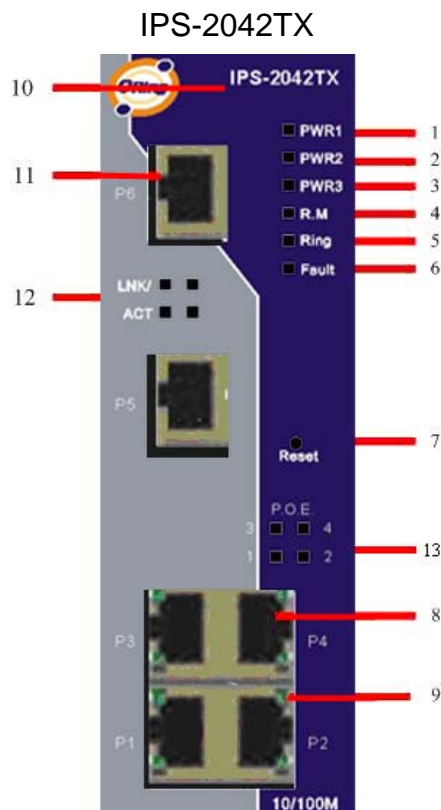

1. LED for PWR1. When the PWR1 links, the green led will be light on.
2. LED for PWR2. When the PWR2 links, the green led will be light on.
3. LED for PWR3. When the PWR3 links, the green led will be light on.
4. LED for R.M (Ring master). When the LED light on, it means that the switch is the ring master of O-Ring.
5. LED for Ring. When the led light on, it means the O-Ring is activated.
6. LED for Fault Relay. When the fault occurs, the amber LED will be light on.
7. Reset button. Push the button 3 seconds for reset; 5 seconds for factory default.
8. 10/100Base-T(X) Ethernet ports..
9. LED for Ethernet ports status.
10. Model name
11. 10/100Base-T(X) Ethernet ports..
12. LED for Ethernet ports status.




3.2 Front Panel LEDs

LED	Color	Status	Description
PW1	Green	On	DC power module 1 activated.
PW2	Green	On	DC power module 2 activated.
PW3	Green	On	Power jack activated.
R.M	Green	On	O-Ring Master.
Ring	Green	On	O-Ring enabled.
		Slowly blinking	O-Ring topology has problem
		Fast blinking	O-Ring work normally.
Fault	Amber	On	Fault relay. Power failure or Port down/fail.
10/100Base-T(X) Fast Ethernet ports			
LNK / ACT	Green	On	Port link up.
		Blinking	Data transmitted.
Full Duplex	Amber	On	Port works under full duplex.
P.O.E	Green	On	P.O.E activated
Fiber ports			
ACT	Green	Blinking	Data transmitted.
LNK	Amber	On	Port link up

3.3 Bottom Panel

The bottom panel components of IPS-2060 & IPS-2042FX Series are showed as below:

1. Terminal block includes: PWR1, PWR2 (12-48V DC) and Relay output (1A@24VDC).
2. Power jack for PWR3 (12-45VDC).

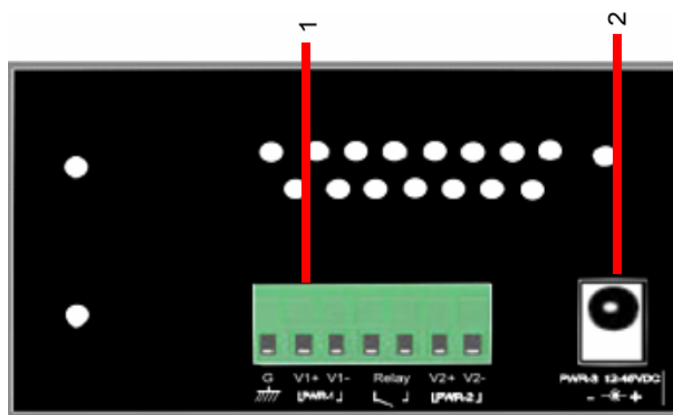


IPS-2060 / IPS-2042F Series

3.4 Rear Panel

The rear panel components of IES-2000 are showed as below:

1. Screw holes for wall mount kit.
2. Din-Rail kit

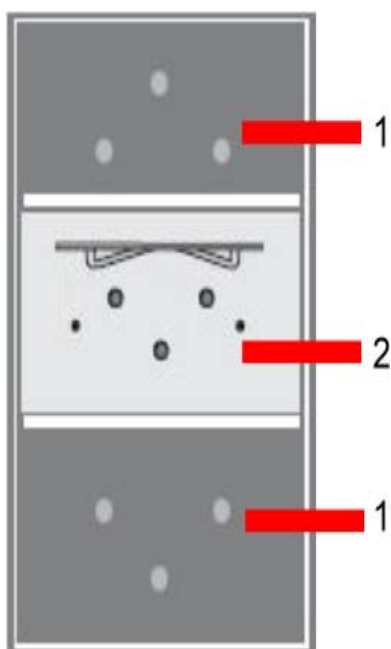

Cables

4.1 Ethernet Cables

The IPS-2000 series switches have standard Ethernet ports. According to the link type, the switches use CAT 3, 4, 5, 5e UTP cables to connect to any other network device (PCs, servers, switches, routers, or hubs). Please refer to the following table for cable specifications.

Cable Types and Specifications

Cable	Type	Max. Length	Connector
10BASE-T	Cat. 3, 4, 5 100-ohm	UTP 100 m (328 ft)	RJ-45
100BASE-TX	Cat. 5 100-ohm UTP	UTP 100 m (328 ft)	RJ-45

4.1.1 100BASE-TX/10BASE-T Pin Assignments

With 100BASE-TX/10BASE-T cable, pins 1 and 2 are used for transmitting data, and pins 3 and 6 are used for receiving data.

RJ-45 Pin Assignments

Pin Number	Assignment
1	TD+
2	TD-
3	RD+
4	Not used
5	Not used
6	RD-
7	Not used
8	Not used

The IPS-2000 series switches support auto MDI/MDI-X operation. You can use a straight-through cable to connect PC and switch. The following table below shows the 10BASE-T/ 100BASE-TX MDI and MDI-X port pin outs.

MDI/MDI-X pins assignment


Pin Number	MDI port	MDI-X port
1	TD+(transmit)	RD+(receive)
2	TD-(transmit)	RD-(receive)

3	RD+(receive)	TD+(transmit)
4	Not used	Not used
5	Not used	Not used
6	RD-(receive)	TD-(transmit)
7	Not used	Not used
8	Not used	Not used

Note: "+" and "-" signs represent the polarity of the wires that make up each wire pair.

4.2 Fibers

The following two models, IPS-2042FX-MM, IPS-2042FX-SS, have fiber optical ports. The fiber optical ports are in multi-mode (0 to 2 km, 1310 nm (50/125 μ m, 62.5/125 μ m) and single-mode with SC connector. Please remember that the TX port of Switch A should be connected to the RX port of Switch B.

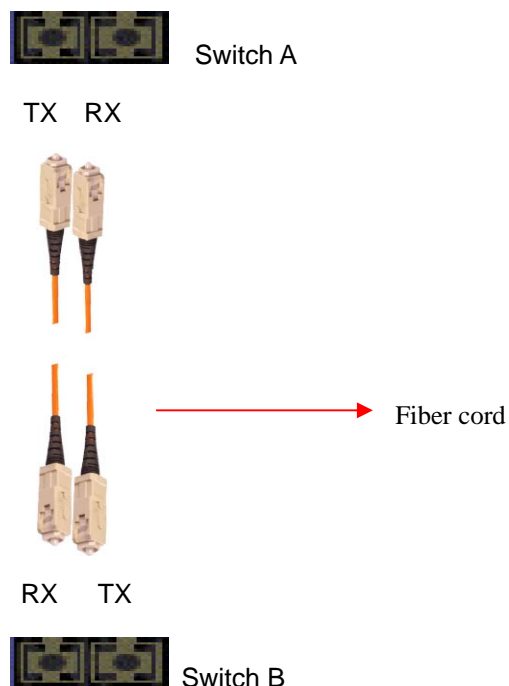

WEB Management

5.1 Configuration by Web Browser

This section introduces the configuration by Web browser.

5.1.1 About Web-based Management

Inside the CPU board of the switch, an embedded HTML website resides in flash memory. It contains advanced management features and allows you to manage the switch from anywhere on the network through a standard browser such as Microsoft Internet Explorer.

The Web-Based Management supports Internet Explorer 5.0. It is based on Java Applets with an aim to reduce network bandwidth consumption, enhance access speed and present an easy viewing screen.

Note: By default, IE5.0 or later version does not allow Java Applets to open sockets. You need to explicitly modify the browser setting in order to enable Java Applets to use network ports.

Preparing for Web Management

The default value is as below:

IP Address: **192.168.10.1**

Subnet Mask: **255.255.255.0**

Default Gateway: **192.168.10.254**

User Name: **admin**

Password: **admin**

System Login

1. Launch the Internet Explorer.
2. Type `http://` and the IP address of the switch. Press "**Enter**".



3. The login screen appears.
4. Key in the username and password. The default username and password is "**admin**".
5. Click "**Enter**" or "**OK**" button, then the main interface of the Web-based management appears.



Connect to 192.168.10.1

index.htm

User name:


Password:

☐ Remember my password

OK Cancel

Login screen

Main Interface

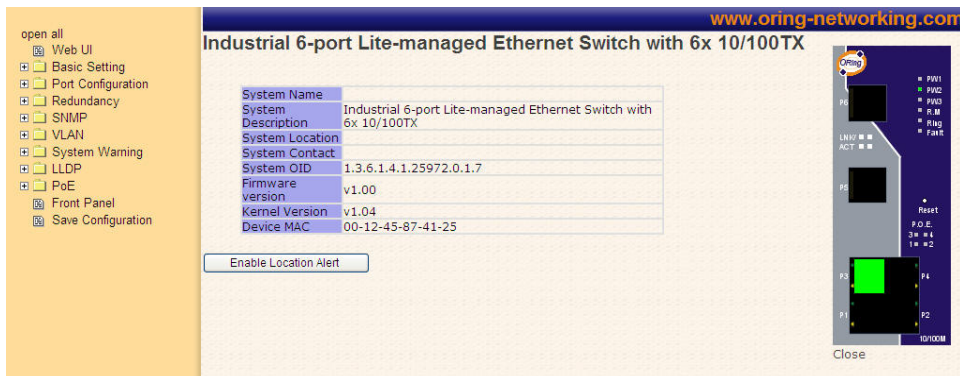

www.oring-networking.com

Industrial 6-port Lite-managed Ethernet Switch with 6x 10/100TX

System Name	
System Description	Industrial 6-port Lite-managed Ethernet Switch with 6x 10/100TX
System Location	
System Contact	
System OID	1.3.6.1.4.1.25972.0.1.7
Firmware version	v1.00
Kernel Version	v1.04
Device MAC	00-12-45-87-41-25


Enable Location Alert

Close

Main interface

5.1.2 Basic Setting

5.1.2.1 Switch setting

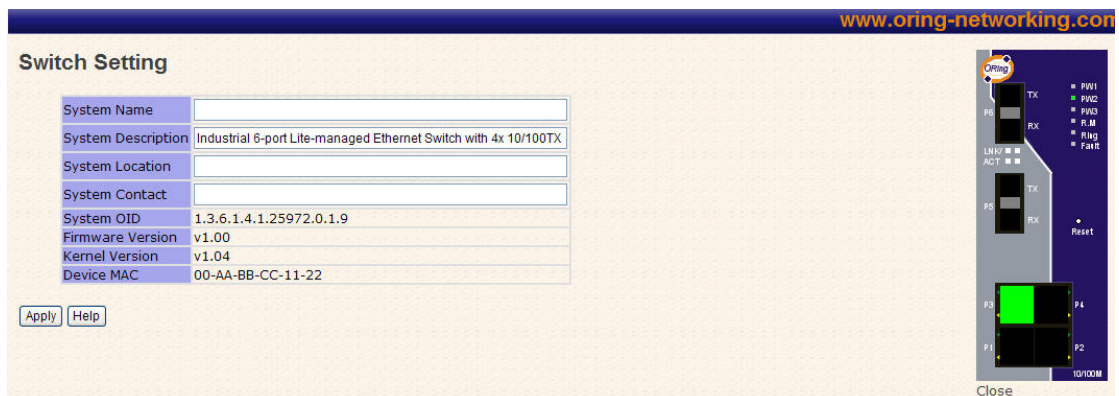

www.oring-networking.com

Switch Setting

System Name	
System Description	Industrial 6-port Lite-managed Ethernet Switch with 4x 10/100TX
System Location	
System Contact	
System OID	1.3.6.1.4.1.25972.0.1.9
Firmware Version	v1.00
Kernel Version	v1.04
Device MAC	00-AA-BB-CC-11-22

Apply Help

Close

Switch setting interface

The following table describes the labels in this screen.

Label	Description
System Name	Assign the name of switch. The maximum length is 64 bytes
System Description	Display the description of switch.
System Location	Assign the switch physical location. The maximum length is 64 bytes
System Contact	Enter the name of contact person or organization
Firmware Version	Display the switch's firmware version
Kernel Version	Display the kernel software version
MAC Address	Display the unique hardware address assigned by manufacturer (default)

5.1.2.2 Admin Password

Change web management login username and password for the management security issue



The screenshot shows the 'Admin Password' configuration page. It has a title 'Admin Password' at the top. Below it are three input fields: 'User Name :' with the value 'admin', 'New Password :' with masked characters '*****', and 'Confirm Password :' with masked characters '*****'. At the bottom left, there are two buttons: 'Apply' and 'Help'.

Admin Password interface

The following table describes the labels in this screen.

Label	Description
User name	Key in the new username (The default is “ admin ”)
New Password	Key in the new password (The default is “ admin ”)
Confirm password	Re-type the new password.
Apply	Click “ Apply ” to set the configurations.

5.1.2.3 IP configuration

You can configure the IP Settings and DHCP client function through IP configuration.



The screenshot shows the 'IP Configuration' web interface. At the top, it says 'DHCP Client : Disable' with a dropdown arrow. Below this are five input fields: 'IP Address' (192.168.10.1), 'Subnet Mask' (255.255.255.0), 'Gateway' (192.168.10.254), 'DNS1' (empty), and 'DNS2' (empty). At the bottom are two buttons: 'Apply' and 'Help'.


IP Configuration interface

The following table describes the labels in this screen.

Label	Description
DHCP Client	To enable or disable the DHCP client function. When DHCP client function is enabling, the switch will assign the IP address from the network DHCP server. The default IP address will be replaced by the IP address which the DHCP server has assigned. After clicking “ Apply ” button, a popup dialog will show up to inform you when the DHCP client is enabling. The current IP will lose and you should find the new IP on the DHCP server.
IP Address	Assign the IP address that the network is using. If DHCP client function is enabling, you do not need to assign the IP address. The network DHCP server will assign the IP address for the switch and it will be displayed in this column. The default IP is 192.168.10.1
Subnet Mask	Assign the subnet mask for the IP address. If DHCP client function is enabling, you do not need to assign the subnet mask.
Gateway	Assign the network gateway for the switch. The default gateway is 192.168.10.254
DNS1	Assign the primary DNS IP address
DNS2	Assign the secondary DNS IP address
Apply	Click “ Apply ” to set the configurations.

5.1.2.4 SNTP Configuration

The SNTP (Simple Network Time Protocol) settings allow you to synchronize switch clocks in the Internet.

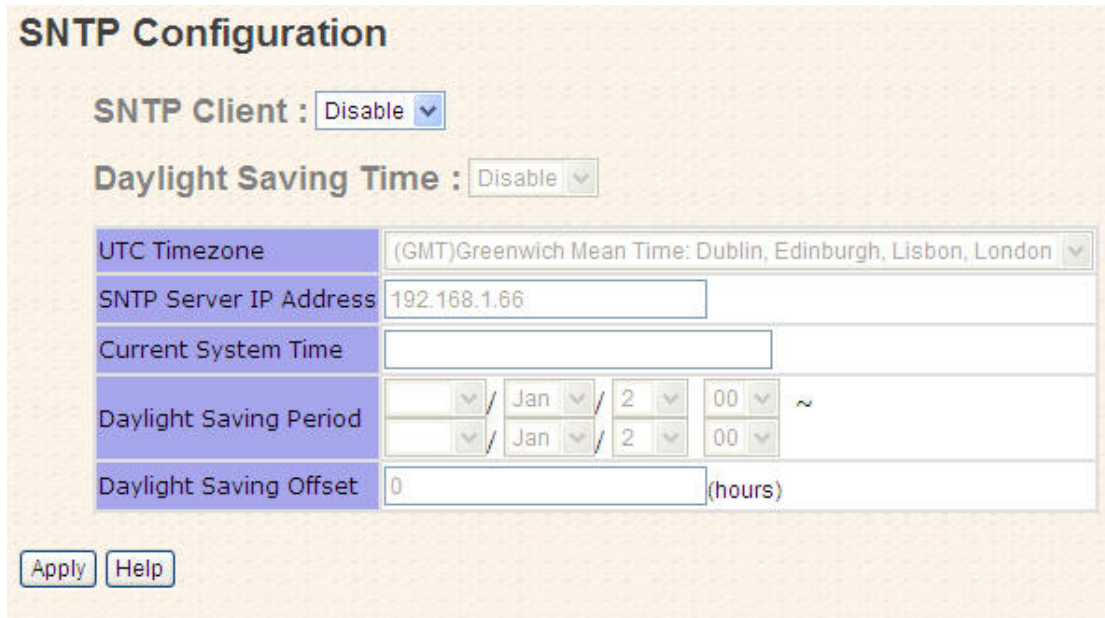

The screenshot shows the SNTP Configuration interface. It includes a title bar 'SNTP Configuration'. Below it, there are two dropdown menus: 'SNTP Client' set to 'Disable' and 'Daylight Saving Time' set to 'Disable'. The 'UTC Timezone' is set to '(GMT)Greenwich Mean Time: Dublin, Edinburgh, Lisbon, London'. The 'SNTP Server IP Address' is '192.168.1.66'. The 'Current System Time' is empty. The 'Daylight Saving Period' is set to 'Jan 2 00 ~ Jan 2 00'. The 'Daylight Saving Offset' is '0 (hours)'. At the bottom, there are 'Apply' and 'Help' buttons.

SNTP Configuration interface

The following table describes the labels in this screen.

Label	Description
SNTP Client	Enable or disable SNTP function to get the time from the SNTP server.
Daylight Saving Time	Enable or disable daylight saving time function. When daylight saving time is enabling, you need to configure the daylight saving time period.
UTC Time zone	Set the switch location time zone. The following table lists the different location time zone for your reference.

Local Time Zone	Conversion from UTC	Time at 12:00 UTC
November Time Zone	- 1 hour	11 am
Oscar Time Zone	-2 hours	10 am
ADT - Atlantic Daylight	-3 hours	9 am
AST - Atlantic Standard	-4 hours	8 am



EDT - Eastern Daylight		
EST - Eastern Standard CDT - Central Daylight	-5 hours	7 am
CST - Central Standard MDT - Mountain Daylight	-6 hours	6 am
MST - Mountain Standard PDT - Pacific Daylight	-7 hours	5 am
PST - Pacific Standard ADT - Alaskan Daylight	-8 hours	4 am
ALA - Alaskan Standard	-9 hours	3 am
HAW - Hawaiian Standard	-10 hours	2 am
Nome, Alaska	-11 hours	1 am
CET - Central European FWT - French Winter MET - Middle European MEWT - Middle European Winter SWT - Swedish Winter	+1 hour	1 pm
EET - Eastern European, USSR Zone 1	+2 hours	2 pm
BT - Baghdad, USSR Zone 2	+3 hours	3 pm
ZP4 - USSR Zone 3	+4 hours	4 pm
ZP5 - USSR Zone 4	+5 hours	5 pm
ZP6 - USSR Zone 5	+6 hours	6 pm
WAST - West Australian Standard	+7 hours	7 pm
CCT - China Coast, USSR Zone 7	+8 hours	8 pm
JST - Japan Standard, USSR Zone 8	+9 hours	9 pm
EAST - East Australian Standard GST	+10 hours	10 pm




Guam Standard, USSR Zone 9		
IDLE - International Date Line NZST - New Zealand Standard NZT - New Zealand	+12 hours	Midnight

Label	Description
SNTP Sever IP Address	Set the SNTP server IP address.
Daylight Saving Period	Set up the Daylight Saving beginning time and Daylight Saving ending time. Both will be different each year.
Daylight Saving Offset	Set up the offset time.
Switch Timer	Display the switch current time.
Apply	Click " Apply " to set the configurations.

5.1.2.5 Backup & Restore

You can save current EEPROM value of the switch to TFTP server, then go to the TFTP restore configuration page to restore the EEPROM value.

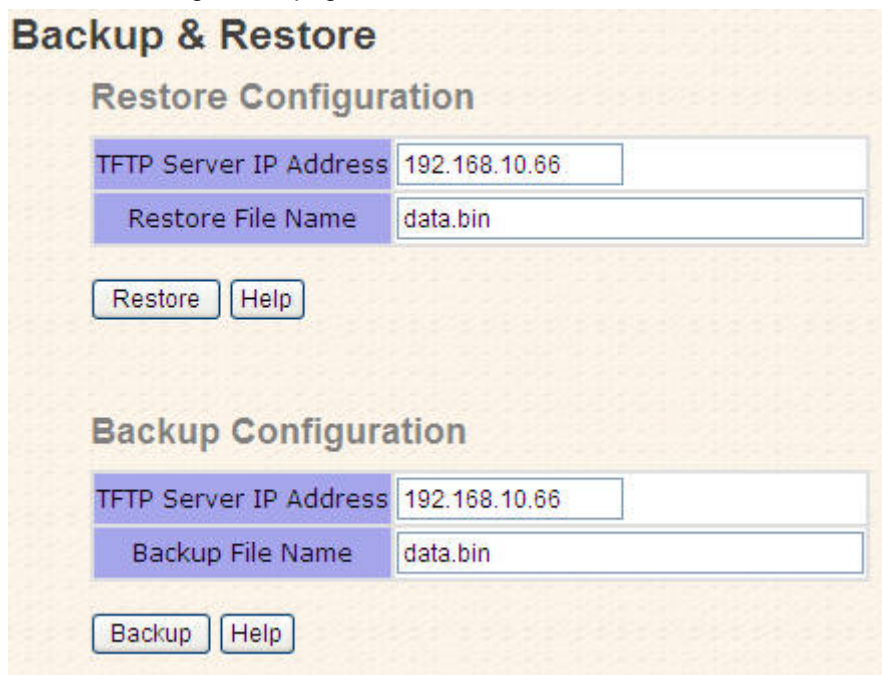

Backup & Restore

Restore Configuration

TFTP Server IP Address: 192.168.10.66

Restore File Name: data.bin

Restore Help

Backup Configuration

TFTP Server IP Address: 192.168.10.66

Backup File Name: data.bin

Backup Help


Backup & Restore interface

The following table describes the labels in this screen.

Label	Description
TFTP Server IP Address	Fill in the TFTP server IP
Restore File Name	Fill the file name.
Restore	Click " restore " to restore the configurations.
Restore File Name	Fill the file name.
Restore	Click " restore " to restore the configurations.
Backup	Click " backup " to backup the configurations.

5.1.2.6 Upgrade Firmware

Upgrade Firmware allows you to update the switch firmware. Before updating, make sure you have your TFTP server ready and the firmware image is on the TFTP server.

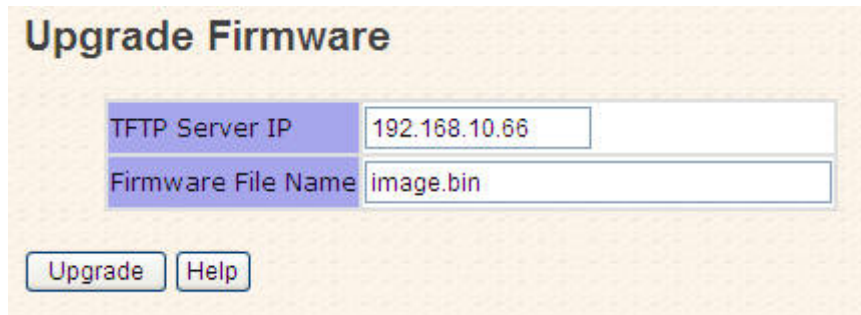

The 'Upgrade Firmware' interface features a title 'Upgrade Firmware' at the top. Below it, there are two input fields: 'TFTP Server IP' with the value '192.168.10.66' and 'Firmware File Name' with the value 'image.bin'. At the bottom, there are two buttons: 'Upgrade' and 'Help'.

Update Firmware interface

5.1.2.7 Factory Default



The 'Factory Default' interface has a title 'Factory Default'. It contains two checked checkboxes: 'Keep current IP address setting?' and 'Keep current username & password?'. At the bottom, there are two buttons: 'Reset' and 'Help'.

Factory Default interface

Reset switch to default configuration. Click **Reset** to reset all configurations to the default value. You can select “**Keep current IP address setting**” and “**Keep current username & password**” to prevent IP and username & password from default.

5.1.2.8 System Reboot




The 'System Reboot' interface has a title 'System Reboot'. It contains a text prompt: 'Please click [Reboot] button to restart switch device.' Below the text is a single button labeled 'Reboot'.

System Reboot interface

5.1.3 Port Configuration

5.1.3.1 Port Control

By this function, you can set the state, speed/duplex, flow control, and security of the port.

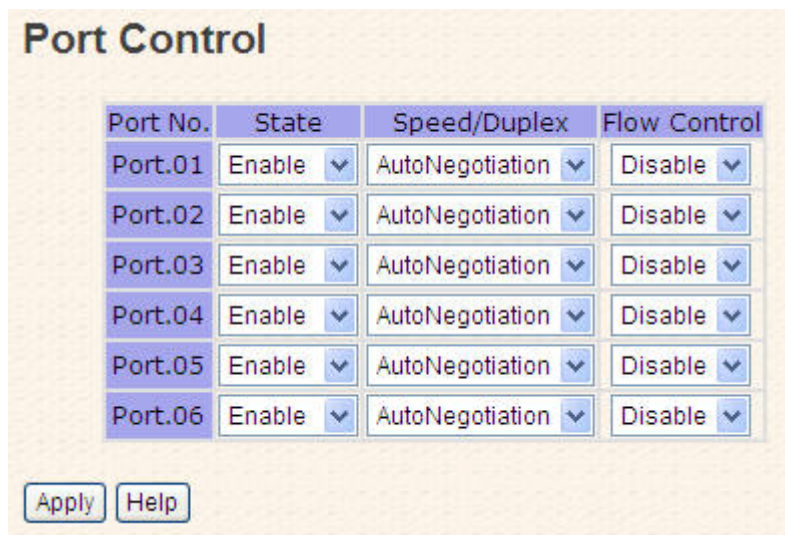

Port No.	State	Speed/Duplex	Flow Control
Port.01	Enable	AutoNegotiation	Disable
Port.02	Enable	AutoNegotiation	Disable
Port.03	Enable	AutoNegotiation	Disable
Port.04	Enable	AutoNegotiation	Disable
Port.05	Enable	AutoNegotiation	Disable
Port.06	Enable	AutoNegotiation	Disable

Apply Help

Port Control interface

The following table describes the labels in this screen.

Label	Description
Port NO.	Port number for setting.
State	Enable/Disable the port.
Speed/Duplex	You can set Auto-negotiation, 100 full,100 half,10 full,10 half mode.
Flow Control	Support symmetric and asymmetric mode to avoid packet loss when congestion occurred.
Apply	Click " Apply " to set the configurations.

5.1.3.2 Port Status

The following information provides the current port status.

Port Status						
Port No.	Type	Link	State	Speed/Duplex	Flow Control	
Port.01	100TX	Down	Enable	N/A	N/A	
Port.02	100TX	Down	Enable	N/A	N/A	
Port.03	100TX	UP	Enable	100 Full	Disable	
Port.04	100TX	Down	Enable	N/A	N/A	
Port.05	100TX	Down	Enable	N/A	N/A	
Port.06	100TX	Down	Enable	N/A	N/A	

Port Status interface

5.1.4 Redundancy

5.1.4.1 Fast Recovery Mode

The Fast Recovery Mode can be set to connect multiple ports to one or more switches.

The IPS-2042 series with its fast recovery mode will provide redundant links. Fast Recovery mode supports 4 priorities, only the first priority will be the act port, the other ports configured with other priority will be the backup ports.

Fast Recovery Mode	
<input checked="" type="checkbox"/> Active	
Port.01	2nd Priority ▼
Port.02	Not included ▼
Port.03	Not included ▼
Port.04	Not included ▼
Port.05	Not included ▼
Port.06	Not included ▼
<input type="button" value="Apply"/>	

Fast Recovery Mode interface


The following table describes the labels in this screen.

Label	Description
Active	Activate the fast recovery mode.
port	Port can be configured as 5 priorities. Only the port with highest priority will be the active port. 1 st Priority is the highest.
Apply	Click “ Apply ” to set the configurations.

5.1.4.2 O-Ring

O-Ring is the most powerful ring in the world. The recovery time of O-Ring is less than 10 mS. It can reduce unexpected damage caused by network topology change.

O-Ring Supports 3 Ring topology: O-Ring, Coupling Ring and Dual Homing.

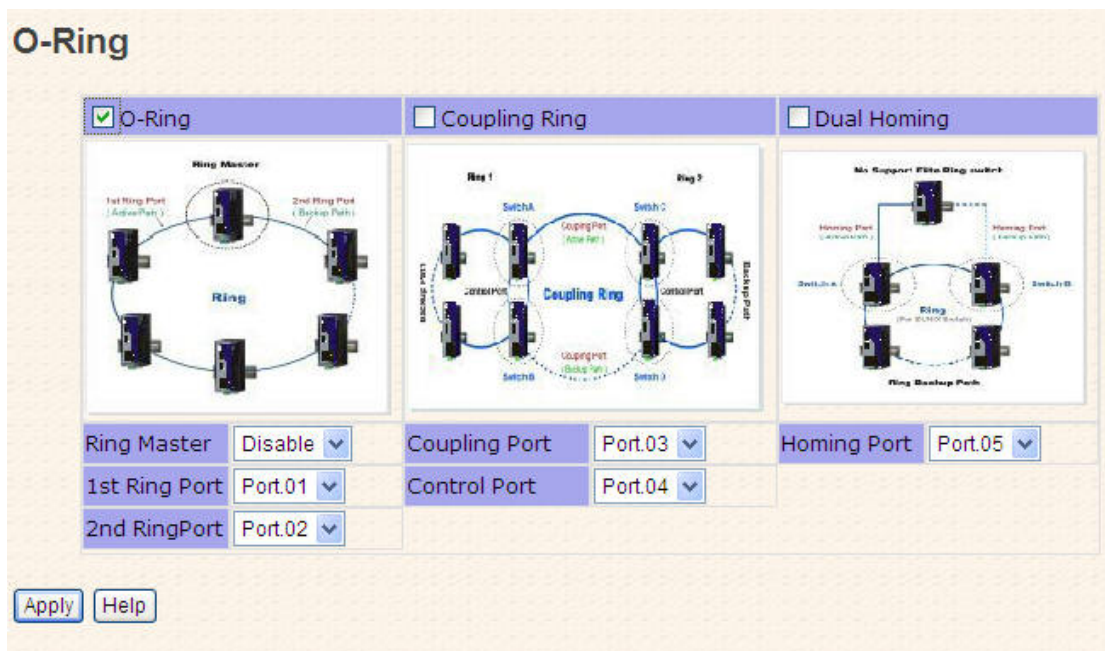

O-Ring interface

The following table describes the labels in this screen.

Label	Description
O-Ring	Mark to enable O-Ring.
Ring Master	There should be one and only one Ring Master in a ring. However if there are two or more switches which set Ring Master to enable, the switch with the lowest MAC address will be the actual Ring Master and others will be Backup Masters.



1st Ring Port	The primary port, when this switch is Ring Master.
2nd Ring Port	The backup port, when this switch is Ring Master.
Coupling Ring	Mark to enable Coupling Ring. Coupling Ring can be used to divide a big ring into two smaller rings to avoid effecting all switches when network topology change. It is a good application for connecting two O-Rings.
Coupling Port	Link to Coupling Port of the switch in another ring. Coupling Ring need four switch to build an active and a backup link. Set a port as coupling port. The coupled four ports of four switches will be run at active/backup mode.
Control Port	Link to Control Port of the switch of the same ring. Control Port used to transmit control signals.
Dual Homing	Mark to enable Dual Homing. By selecting Dual Homing mode, O-Ring will be connected to normal switches through two RSTP links (ex: backbone Switch). The two links work as active/backup mode, and connect each O-Ring to the normal switches in RSTP mode.
Apply	Click " Apply " to set the configurations.

Note: We don't suggest you to set one switch as a Ring Master and a Coupling Ring at the same time due to heavy load.

5.1.5 RSTP

The Rapid Spanning Tree Protocol (RSTP) is an evolution of the Spanning Tree Protocol. It provides faster spanning tree convergence after a topology change. The system also supports STP and the system will auto detect the connected device that is running STP or RSTP protocol.

5.1.5.1 RSTP setting

You can enable/disable the RSTP function, and set the parameters for each port.

RSTP Setting

RSTP Mode

Enable ▾

Bridge Configuration

Priority (0-61440)	32768
Max Age Time(6-40)	20
Hello Time (1-10)	2
Forward Delay Time (4-30)	15

Port Configuration

Port	Path Cost (1-2000000000)	Priority (0-240)	Admin P2P	Admin Edge	Admin Non STP
1	200000	128	Auto ▾	True ▾	False ▾
2	200000	128	Auto ▾	True ▾	False ▾
3	200000	128	Auto ▾	True ▾	False ▾
4	200000	128	Auto ▾	True ▾	False ▾
5	200000	128	Auto ▾	True ▾	False ▾
6	200000	128	Auto ▾	True ▾	False ▾

Apply

Help

RSTP Setting interface

The following table describes the labels in this screen.

Label	Description
RSTP mode	You must enable or disable RSTP function before configuring the related parameters.
Priority (0-61440)	A value used to identify the root bridge. The bridge with the lowest value has the highest priority and is selected as the root. If the value changes, you must reboot the switch. The value must be multiple of 4096 according to the protocol standard rule.
Max Age (6-40)	The number of seconds a bridge waits without receiving Spanning-tree Protocol configuration messages before attempting a reconfiguration. Enter a value between 6 through 40.
Hello Time (1-10)	The time that controls switch sends out the BPDU packet to check RSTP current status. Enter a value between 1 through 10.
Forwarding Delay Time (4-30)	The number of seconds a port waits before changing from its Rapid Spanning-Tree Protocol learning and listening states to the forwarding state. Enter a value between 4 through 30.
Path Cost (1-200000000)	The cost of the path to the other bridge from this transmitting bridge at the specified port. Enter a number 1 through 200000000.
Priority (0-240)	Decide which port should be blocked by priority in LAN. Enter a number 0 through 240. The value of priority must be the multiple of 16
Admin P2P	Some of the rapid state transactions that are possible within RSTP are dependent upon whether the port concerned can only be connected to exactly one other bridge (i.e. It is served by a point-to-point LAN segment), or it can be connected to two or more bridges (i.e. It is served by a shared medium LAN segment). This function allows the P2P status of the link to be manipulated administratively. True means P2P enabling. False means P2P disabling.
Admin Edge	The port is directly connected to end stations, and it cannot create bridging loop in the network. To configure the port as an edge port, set the port to "True" .
Admin Non STP	The port includes the STP mathematic calculation. True is

	not including STP mathematic calculation. False is including the STP mathematic calculation.
Apply	Click " Apply " to set the configurations.

NOTE: Follow the rule to configure the MAX Age, Hello Time, and Forward Delay Time.

$$2 \times (\text{Forward Delay Time value} - 1) \geq \text{Max Age value} \geq 2 \times (\text{Hello Time value} + 1)$$

RSTP Information

Show RSTP algorithm result at this table.

RSTP Information

Root Bridge Information

Bridge ID	0080001245874125
Root Priority	32768
Root Port	Root
Root Path Cost	0
Max Age Time	20
Hello Time	2
Forward Delay Time	15

Port Information

Port	Path Cost	Port Priority	OperP2P	OperEdge	STP Neighbor	State	Role
Port.01	200000	128	True	True	False	Disabled	Disabled
Port.02	200000	128	True	True	False	Disabled	Disabled
Port.03	200000	128	True	True	False	Forwarding	Designated
Port.04	200000	128	True	True	False	Disabled	Disabled
Port.05	200000	128	True	True	False	Disabled	Disabled
Port.06	200000	128	True	True	False	Disabled	Disabled

RSTP Information interface

]

5.1.6 SNMP Configuration

Simple Network Management Protocol (SNMP) is the protocol developed to manage nodes (servers, workstations, routers, switches and hubs etc.) on an IP network. SNMP enables network administrators to manage network performance, find and solve network problems, and plan for network growth. Network management systems learn of problems by receiving traps or change notices from network devices implementing SNMP.

5.1.6.1 SNMP –Agent Setting

You can set SNMP agent related information by Agent Setting Function.



The screenshot shows a web interface titled "SNMP - Agent Setting". It contains a table with two columns: "Community String" and "Privilege". There are four rows in the table. The first row has "public" in the Community String field and "Read Only" in the Privilege dropdown. The second row has "private" in the Community String field and "Read and Write" in the Privilege dropdown. The third and fourth rows have empty Community String fields and "Read Only" in the Privilege dropdown. Below the table are "Apply" and "Help" buttons.

Community String	Privilege
public	Read Only
private	Read and Write
	Read Only
	Read Only


Apply Help

The following table describes the labels in this screen.

Label	Description
SNMP –Agent Setting	SNMP Community should be set for SNMP. Four sets of "Community String/Privilege" are supported. Each Community String is maximum 32 characters. Keep empty to remove this Community string.

5.1.6.2 SNMP –Trap Setting

A trap manager is a management station that receives traps, the system alerts generated by the switch. If no trap manager is defined, no traps will issue. Create a trap manager by entering the IP address of the station and a community string. To define management stations as trap manager and enter SNMP community strings and selects the SNMP version.

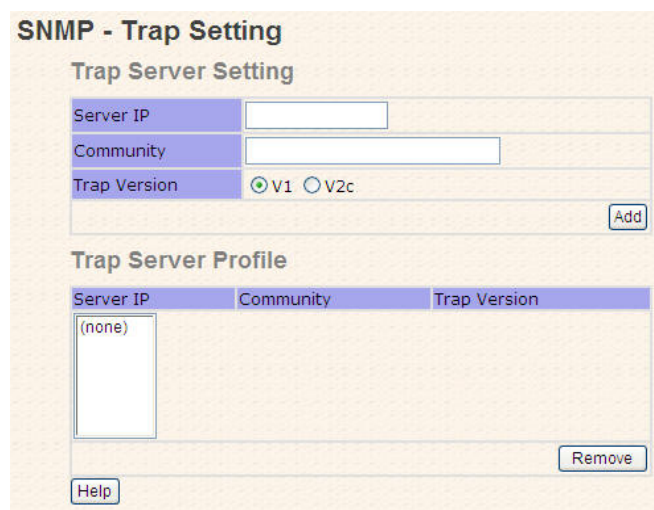

The screenshot shows the 'SNMP - Trap Setting' web interface. It has a title bar 'SNMP - Trap Setting'. Below it is a section 'Trap Server Setting' with three input fields: 'Server IP', 'Community', and 'Trap Version'. The 'Trap Version' field has two radio buttons, 'V1' (selected) and 'V2c'. There is an 'Add' button to the right of these fields. Below this is a section 'Trap Server Profile' which contains a table with three columns: 'Server IP', 'Community', and 'Trap Version'. The table has one row with the value '(none)' in the 'Server IP' column. There is a 'Remove' button to the right of the table and a 'Help' button at the bottom left.

The following table describes the labels in this screen.


Label	Description
Server IP	The server IP address to receive Trap
Community	Community for authentication
Trap Version	Trap Version supports V1 and V2c.
Add	Add trap server profile.
Remove	Remove trap server profile.
Help	Show help file.

5.1.7 VLAN

A Virtual LAN (VLAN) is a logical network grouping that limits the broadcast domain, which allows you to isolate network traffic. Only the members of the VLAN will receive traffic from the same members of VLAN. Basically, creating a VLAN from a switch is logically equivalent of reconnecting a group of network devices to another Layer 2 switch. However, all the network devices are still plugged into the same switch physically. The switch supports port-based VLAN only.

5.1.7.1 VLAN Configuration – Port Based

Packets can go among only members of the same VLAN group. Note all unselected ports are treated as belonging to another single VLAN. If the port-based VLAN enabled, the VLAN-tagging is ignored.

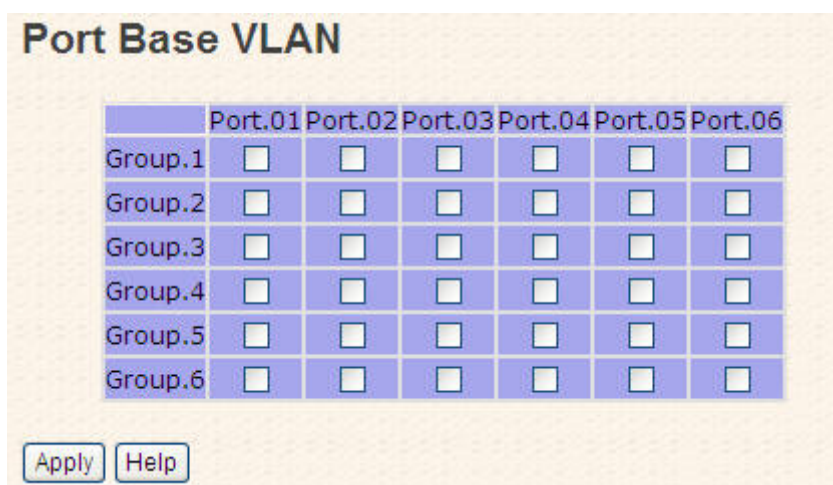

	Port.01	Port.02	Port.03	Port.04	Port.05	Port.06
Group.1	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Group.2	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Group.3	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Group.4	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Group.5	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Group.6	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Apply Help

VLAN Configuration – Port Based VLAN interface

The following table describes the labels in this screen.


Label	Description
Group	Mark the blank to assign the port into VLAN group.
Apply	Click “ Apply ” to set the configurations.
Help	Show help file.

5.1.8 Warning

Warning function is very important for managing switch. You can manage switch by SYSLOG, E-MAIL, and Fault Relay. It helps you to monitor the switch status on remote site. When events occurred, the warning message will send to your appointed server, E-MAIL, or relay fault to switch panel.

5.1.8.1 Fault Alarm


When any selected fault event is happened, the Fault LED in switch panel will light up and the electric relay will signal at the same time.

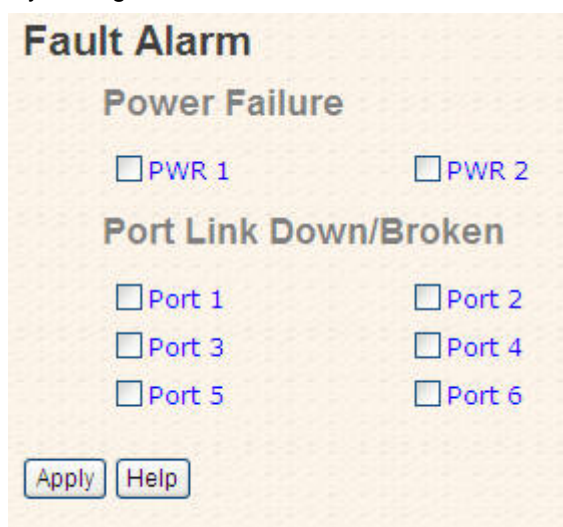

System Warning – SYSLOG Setting

The SYSLOG is a protocol to transmit event notification messages across networks.

Please refer to RFC 3164 - The BSD SYSLOG Protocol

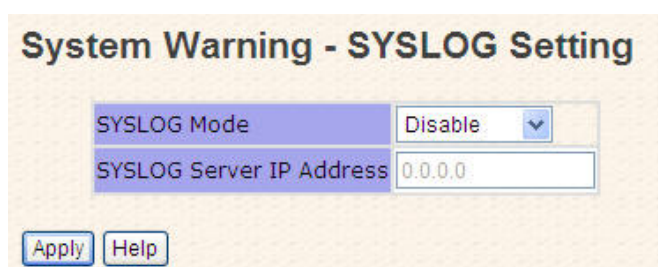

System Warning – SYSLOG Setting interface


The following table describes the labels in this screen.

Label	Description
SYSLOG Mode	<ul style="list-style-type: none"> ■ Disable: disable SYSLOG. ■ Client Only: log to local system. ■ Server Only: log to a remote SYSLOG server.

	<ul style="list-style-type: none"> ■ Both: log to both of local and remote server.
SYSLOG Server IP Address	The remote SYSLOG Server IP address.
Apply	Click " Apply " to set the configurations.
Help	Show help file.

System Event LOG

If system log client is enabled, the system event logs will show in this table.

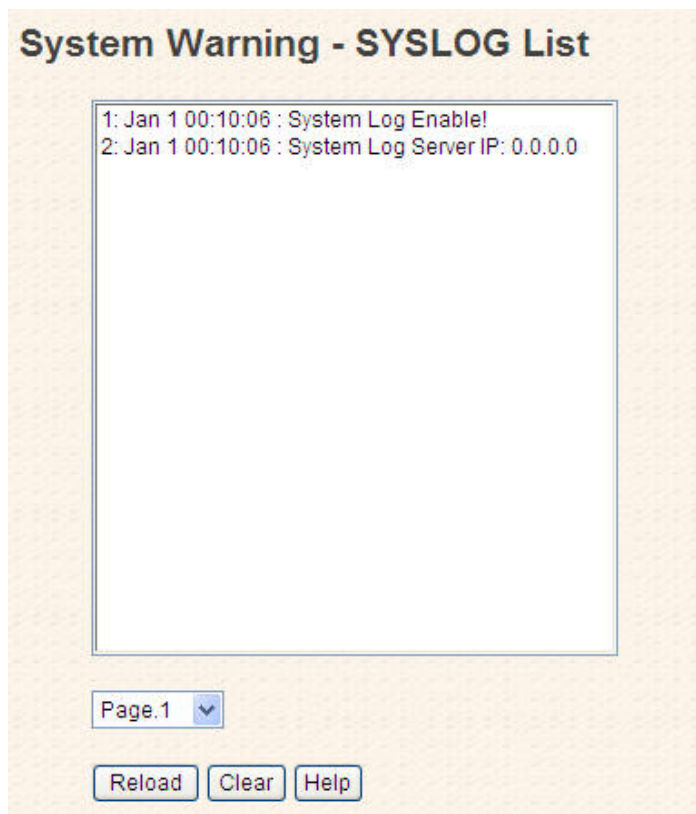


System event log interface

The following table describes the labels in this screen.

Label	Description
Page	Select LOG page.
Reload	To get the newest event logs and refresh this page.
Clear	Clear log.
Help	Show help file.

System Warning – SMTP Setting

The SMTP is Short for Simple Mail Transfer Protocol. It is a protocol for e-mail transmission across the Internet. Please refer to RFC 821 - Simple Mail Transfer Protocol.

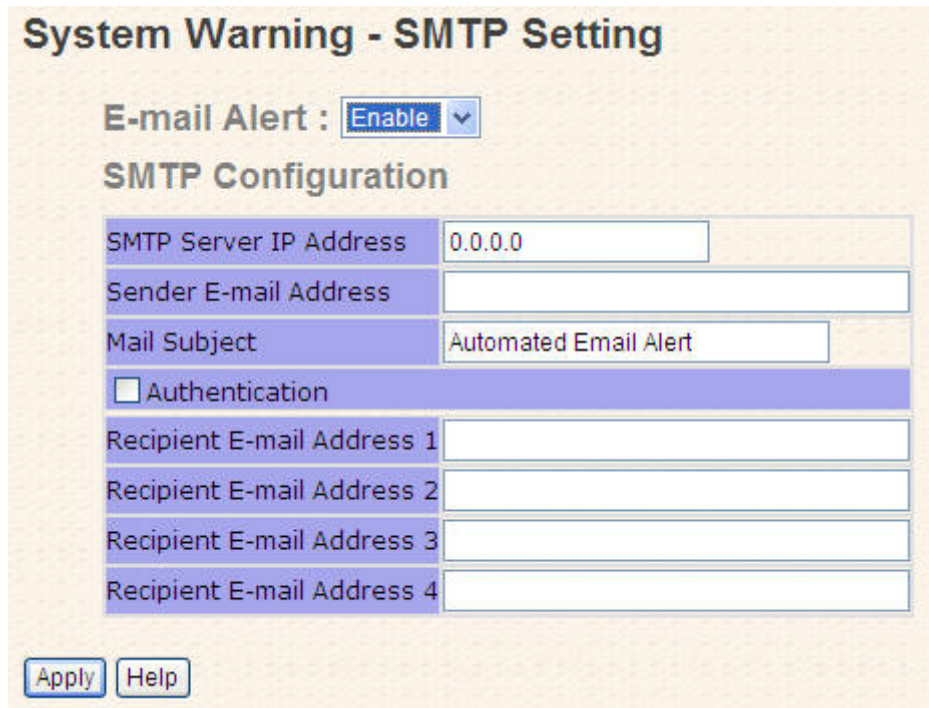

System Warning – SMTP Setting interface

The following table describes the labels in this screen.

Label	Description
E-mail Alarm	Enable/Disable transmission system warning events by e-mail.
Sender E-mail Address	The SMTP server IP address
Mail Subject	The Subject of the mail
Authentication	<ul style="list-style-type: none"> ■ Username: the authentication username. ■ Password: the authentication password. ■ Confirm Password: re-enter password.
Recipient E-mail Address	The recipient's E-mail address. It supports up to 6 recipients per mail.
Apply	Click " Apply " to set the configurations.
Help	Show help file.

System Warning – Event Selection

SYSLOG and SMTP are the two warning methods that supported by the system.

Check the corresponding box to enable system event warning method you wish to choose. Please note that the checkbox can not be checked when SYSLOG or SMTP is disabled.

System Warning - Event Selection

System Event

Event	SYSLOG	SMTP
System Cold Start	<input checked="" type="checkbox"/>	<input type="checkbox"/>
O-Ring Topology Change	<input type="checkbox"/>	<input type="checkbox"/>

Port Event

Port No.	SYSLOG	SMTP
Port.01	Disable	Disable
Port.02	Disable	Disable
Port.03	Disable	Disable
Port.04	Disable	Disable
Port.05	Disable	Disable
Port.06	Disable	Disable


System Warning – Event Selection interface

The following table describes the labels in this screen.

Label	Description
System Event	
System Cold Start	Alert when system restart
O-Ring Topology Change	Alert when O-Ring topology change
Port Event	<ul style="list-style-type: none"> ■ Disable ■ Link Up ■ Link Down ■ Link Up & Link Down
Apply	Click " Apply " to set the configurations.
Help	Show help file.


5.1.9 Front Panel

Show IPS-2000 series panel. Click **"Close"** to close panel on web.

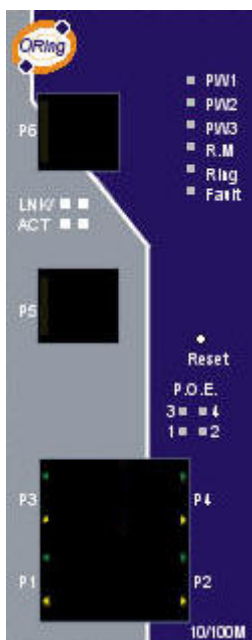

5.1.10 Save Configuration

If any configuration changed, **"Save Configuration"** should be clicked to save current configuration data into the permanent flash memory. Otherwise, the current configuration will be lost when power off or system reset.

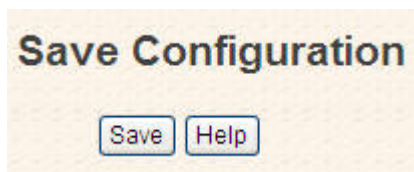


System Configuration interface

The following table describes the labels in this screen.

Label	Description
Save	Save all configurations.
Help	Show help file.

5.1.11 LLDP

LLDP (Link Layer Discovery Protocol) function allows the switch to advertise its information to other nodes on the network and store the information it discovers.

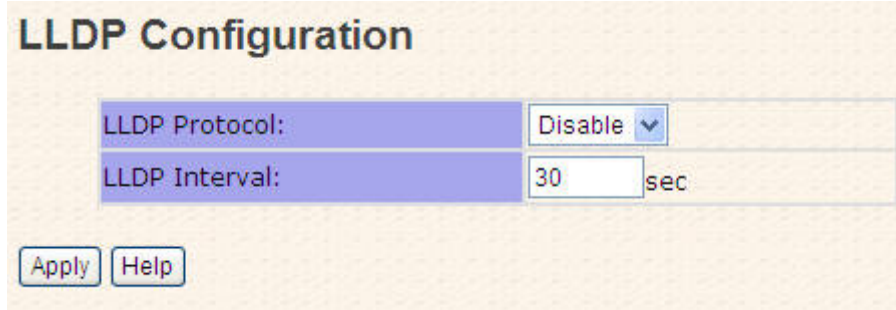


The screenshot shows the 'LLDP Configuration' window. It contains two main settings: 'LLDP Protocol' set to 'Disable' and 'LLDP Interval' set to '30' seconds. At the bottom, there are 'Apply' and 'Help' buttons.

The following table describes the labels in this screen.

Label	Description
LLDP Protocol	“Enable” or “Disable” LLDP function.
LLDP Interval	The interval of resend LLDP (by default at 30 seconds)
Apply	Click “ Apply ” to set the configurations.
Help	Show help file.

5.1.12 Power over Ethernet (P.O.E)

The following interface is the PoE setting interface. There are 4 ports (port 1 to port 4) can be set as PSE (Power Supply Equipment) ports.

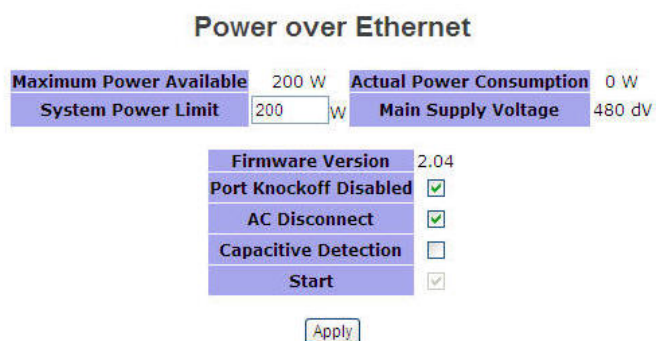

The screenshot shows the 'Power over Ethernet' configuration window. It displays 'Maximum Power Available' as 200 W and 'Actual Power Consumption' as 0 W. Below this, 'System Power Limit' is set to 200 W and 'Main Supply Voltage' is 480 dV. A list of settings includes 'Firmware Version' (2.04), 'Port Knockoff Disabled' (checked), 'AC Disconnect' (checked), 'Capacitive Detection' (unchecked), and 'Start' (checked). An 'Apply' button is at the bottom.

The following table describes the labels in this screen.

Label	Description
Maximum Power Available	Display the maximum power available.

System Power Limit	Set the system power limit.
Actual Power Consumption	Display the actual power consumption.
Main Supply Voltage	Display the main supply voltage.
Firmware Version	Display the firmware version.
Pork Knockoff Disabled	Mark the blank to enable "Pork Knock off Disabled" function.
AC Disconnect	Mark the blank to enable "AC Disconnect" function.
Capacitive Detection	Mark the blank to enable "Capacitive Detection" function
Start	Mark the blank to enable "P.O.E" function.
Apply	Click " Apply " to set the configurations.

Port	Enable state	Power Limit From Classification	Legacy	Priority	Power Limit (<25000) (mW)	Mode	Current (mA)	Voltage (V)	Power (mW)	Determined Class
1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Low	15400	Null	0	0.0	0	0:15.4W
2	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Low	15400	Null	0	0.0	0	0:15.4W
3	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Low	15400	Null	0	0.0	0	0:15.4W
4	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Low	15400	Null	0	0.0	0	0:15.4W

Apply

The following table describes the labels in this screen.

Label	Description
Port	Port number.
Enable state	Mark the blank to enable specific ports' P.O.E function
Power Limit From Classification	Set the "Power Limit From Classification" function for each P.O.E ports
Legacy	The legacy detection is to identify the PD devices that did not follow the IEEE 802.3af standard their unique electrical signatures in order for the PoE switch can provide the power to those PD devices
Priority	Set port priority for the POE power management. 1 = C (critical), 2 = H (High), 3 = L (Low)
Power Limit	Set the power limit value. The maximum value must less 15400
Mode	Display the PD current operation mode status
Current(mA)	Display current value
Voltage(V)	Display voltage value

Power(mW)	Display watt value
Determined Class	Display power class. When the Bypass classification enable, the class value will not show in here
Apply	Click " Apply " to set the configurations.

Technical Specifications

Technology	
Ring redundancy	<ul style="list-style-type: none"> ■ RSTP ■ O-Ring ■ Couple Ring ■ Dual Homing ■ Fast recovery
Ethernet Standards	IEEE802.3 10BASE-T IEEE802.3u 100BASE-TX IEEE802.3x Flow Control and Back pressure IEEE802.1D Spanning tree protocol IEEE802.1w Rapid Spanning tree protocol IEEE 802.1AB LLDP
MAC addresses	1024
Flow Control	IEEE 802.3x Flow Control and Back-pressure
VLAN	Port based
Processing	Store-and-Forward
Firmware upgrade	TFTP
Interface	
RJ45 Ports	10/100Base-T(X), Auto MDI/MDI-X
Fiber Ports	100 Base-FX(SC Connector) Multi-Mode: 0 to 2 km, 1310 nm (50/125 μm to 62.5/125 μm) Single-Mode: 0 to 30 km, 1310 nm (9/125 μm)



LED Indicators	Per Unit : Power (Green/Red) RJ45 Ports: Per Port : Link/Activity(Green/Blinking Green), Ring Port (Amber)
Power Requirements	
Power Input Voltage	PWR1/2: 12 to 48VDC in 7-pin Terminal Block PWR3: 12 to 45VDC in Power Jack
Reverse Polarity Protection	Present at terminal block
Power Consumption	7 Watts Max
Environmental	
Wide Operating Temperature	-40 to 75°C
Storage Temperature	-40 to 85°C
Operating Humidity	5% to 95%, non-condensing
Mechanical	
Dimensions(W x D x H)	52 mm(W)x 106 mm(D)x 144 mm(H)
Casing	IP-30 protection
Regulatory Approvals	
Regulatory Approvals	FCC Part 15, CISPER (EN55022) class A
EMS	EN61000-4-2 (ESD), EN61000-4-3 (RS), EN61000-4-4 (EFT), EN61000-4-5 (Surge), EN61000-4-6 (CS)
Shock	IEC60068-2-27
Free Fall	IEC 60068-2-32
Vibration	IEC 60068-2-6
Warranty	5 years